




S210/K/N

Materials

Stationary - Cer, Sic
 Rotary - Car, Sic
 Elastomer - NBR, EPDM, Vit

Working Conditions

Pressure < 8 bar
 Speed < 10 m/s
 Temperature up to 150°C

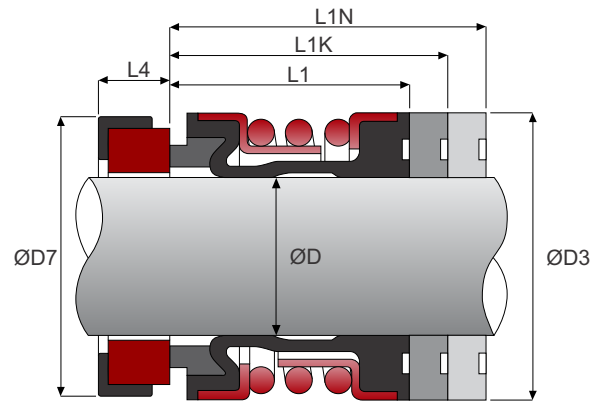

Metric		ØD3	ØD7	L1	L1K	L1N	L4
Shaft ØD	Code						
10	0100	20	21	15	27.5	35.0	5
12	0120	22	23	15	26.5	34.0	6
14	0140	24	25	15	29.0	34.0	6
15	0150	25	26	15	29.0	34.0	6
16	0160	26	27	15	29.0	34.0	6
18	0180	32	33	20	31.5	39.0	6
20	0200	34	35	20	31.5	39.0	6
22	0220	36	37	20	31.5	39.0	6
24	0240	38	39	20	34.0	44.0	6
25	0250	39	40	20	34.0	44.0	6
28	0280	42	43	26	36.5	44.0	6
30	0300	44	45	26	35.5	43.0	7
32	0320	46	48	26	35.5	48.0	7
33	0330	47	48	26	35.5	48.0	7
35	0350	49	50	26	34.5	47.0	8
38	0380	54	56	30	37.0	47.0	8
40	0400	56	58	30	37.0	47.0	8
43	0430	59	61	30	37.0	52.0	8
45	0450	61	63	30	37.0	52.0	8
48	0480	64	66	30	35.0	50.0	10
50	0500	66	70	30	37.5	50.0	10
53	0530	69	73	30	37.5	60.0	10
55	0550	71	75	30	37.5	60.0	10
58	0580	78	78	33	42.5	60.0	10
60	0600	80	80	33	40.5	58.0	12
63	0630	83	83	33	40.5	58.0	12
65	0650	85	85	33	40.5	68.0	12
68	0680	88	90	33	40.5	68.0	12
70	0700	90	92	33	48.0	68.0	12
75	0750	99	97	40	48.0	68.0	12
80	0800	104	105	40	47.5	77.5	14
85	0850	109	110	40	47.5	77.5	14
90	0900	114	115	40	52.5	77.5	14
95	0950	119	120	40	52.5	77.5	14
100	1000	124	125	40	52.5	77.5	14