

S6A




Materials

Stationary - Cer, Sic
 Rotary - Car, Sic
 Elastomer - NBR, EPDM, Vit

Working Conditions

Pressure < 6 bar
 Speed < 10 m/s
 Temperature up to 150°C

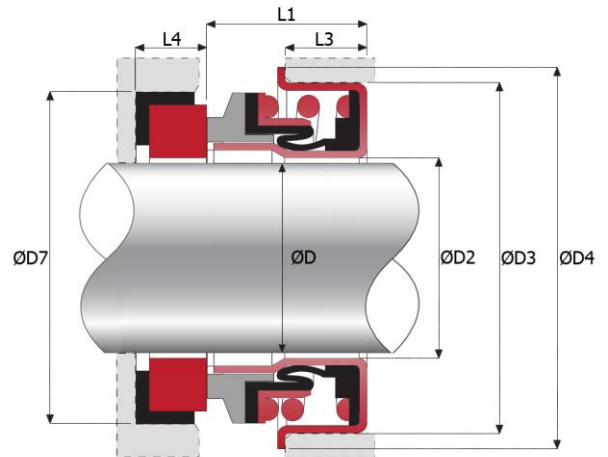

Inches		ØD2	ØD3	ØD4	ØD7	L1	L3	L4
Shaft ØD	Code							
1/2"A	127A	14.0	28.5	31.7	25.00	13.2	8.0	5.0
1/2"B	127B	14.0	30.0	35.0	25.00	13.0	8.0	5.0
1/2"C	127C	14.0	33.4	38.0	25.00	13.0	6.7	5.0
5/8"A	159A	18.0	36.5	41.3	31.00	14.8	8.0	5.0
5/8"B	159B	18.0	38.1	41.3	31.75	14.8	8.0	10.3
3/4"A	191A	21.0	38.0	43.7	35.00	15.5	9.5	5.0
3/4"B	191B	21.0	40.0	43.7	35.00	15.5	9.5	10.3
1"A	254A	26.4	47.0	51.0	44.00	18.0	10.0	7.0
1 1/8"A	286A	31.0	52.0	57.0	48.00	19.0	11.0	8.0


S106

Materials

Stationary - Cer, Sic
 Rotary - Car, Sic
 Elastomer - NBR, EPDM, Vit

Working Conditions

Pressure < 5 bar
 Speed < 12 m/s
 Temperature up to 150°C

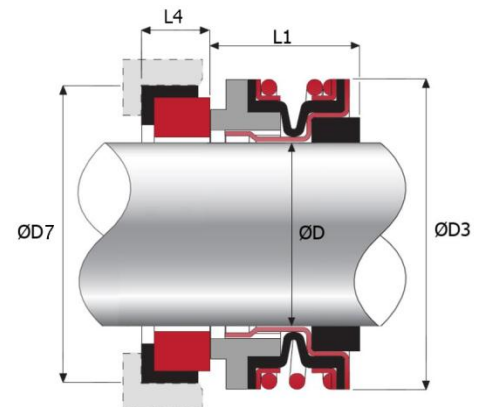

Inches		ØD3	ØD7	L1	L4
Shaft ØD	Code				
0.375	0095	23.80	22.22	16.02	6.20
0.500	0127	26.97	25.40	16.60	6.20
0.625R	R159	30.94	31.75	18.71	10.29
0.625P	P159	30.94	30.10	17.80	8.70
0.750	0191	34.11	34.93	18.71	10.29
1.000	0254	42.85	41.28	20.63	11.10