


# SS16/SS46

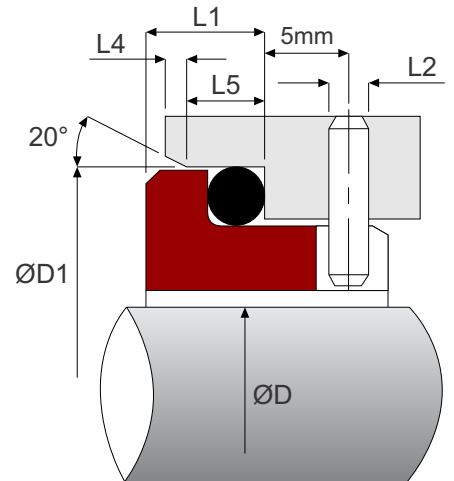

## Materials

Stationary - Cer, Sic, SSic, TC

Elastomer - NBR, EPDM, Viton, PTFE

Metric		ØD1	ØD2	SS16		SS46		L2	L4	L5
Shaft ØD	Code			L1	L6	L1	L6			
18	0180	33.0	27	7.0	15.0	9.0	17.0	3.0	1.5	5.0
20	0200	35.0	29	7.0	15.0	9.0	17.0	3.0	1.5	5.0
22	0220	37.0	31	7.0	15.0	9.0	17.0	3.0	1.5	5.0
24	0240	39.0	33	7.0	15.0	9.0	17.0	3.0	1.5	5.0
25	0250	40.0	34	7.0	15.0	9.0	17.0	3.0	1.5	5.0
28	0280	43.0	37	7.0	15.0	9.5	17.5	3.0	1.5	5.0
30	0300	45.0	39	7.0	15.0	9.5	17.5	3.0	1.5	5.0
32	0320	48.0	42	7.0	15.0	9.5	17.5	3.0	1.5	5.0
33	0330	48.0	42	7.0	15.0	9.5	17.5	3.0	1.5	5.0
35	0350	50.0	44	7.0	15.0	9.5	17.5	3.0	1.5	5.0
38	0380	56.0	49	8.0	16.0	10.5	18.5	4.0	1.5	6.0
40	0400	58.0	51	8.0	16.0	10.5	18.5	4.0	1.5	6.0
43	0430	61.0	54	8.0	16.0	10.5	18.5	4.0	1.5	6.0
45	0450	63.0	56	8.0	16.0	10.5	18.5	4.0	2.0	6.0
48	0480	66.0	59	8.0	16.0	10.5	18.5	4.0	2.0	6.0
50	0500	70.0	62	9.5	17.0	12.0	19.5	4.0	2.0	6.0
53	0530	73.0	65	9.5	17.0	12.0	19.5	4.0	2.0	6.0
55	0550	75.0	67	9.5	17.0	12.0	19.5	4.0	2.0	6.0
58	0580	78.0	70	10.5	18.0	13.0	20.5	4.0	2.0	6.0
60	0600	80.0	72	10.5	18.0	13.0	20.5	4.0	2.0	6.0
65	0650	85.0	77	10.5	18.0	13.0	20.5	4.0	2.0	6.0
68	0680	90.0	81	11.0	18.5	13.5	21.0	4.0	2.0	7.0
70	0700	92.0	83	11.5	19.0	14.0	21.5	4.0	2.0	7.0
75	0750	97.0	88	11.5	19.0	14.0	21.5	4.0	2.0	7.0
80	0800	105.0	95	11.5	19.0	14.0	21.5	4.0	2.0	7.0
85	0850	110.0	100	11.5	19.0	14.0	21.5	4.0	2.0	7.0
90	0900	115.0	105	13.0	20.5	15.5	23.0	4.0	2.0	7.0
95	0950	120.0	110	13.0	20.5	15.5	23.0	4.0	2.0	7.0
100	1000	125.0	115	13.0	20.5	15.5	23.0	4.0	2.0	7.0