


# SS55



## Materials

Stationary - Cer, Sic, SSic, TC, ChrStl  
 Elastomer - NBR, EPDM, Viton

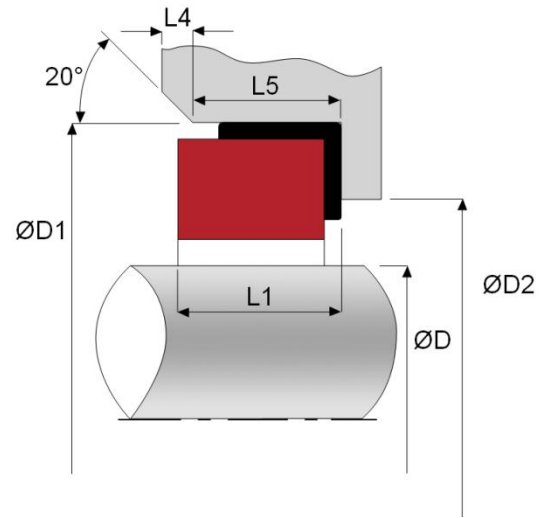

Shaft ØD			ØD1	ØD2	L1	L4	L5
Inches	Code	Metric					
0.375	0095	10	22.23	15.88	7.9	1.27	6.35
0.500	0127	12	25.40	19.05	7.9	1.27	6.35
0.625	0158	14	31.75	23.80	10.3	1.27	8.74
		16					
0.750	0191	17	34.93	26.97	10.3	1.27	8.74
		18					
		19					
0.810	0206	20					
0.875	0222	22	38.10	30.15	10.3	1.27	8.74
1.000	0254	24	41.28	33.32	11.1	1.27	9.53
		25					
1.125	0285	27	44.45	36.50	11.1	1.27	9.53
		28					
		29					
1.250	0317	30	47.63	39.70	11.1	1.27	9.53
		32					
1.375	0349	34	50.80	42.85	11.1	1.27	9.53
		35					
1.500	0381	38	53.98	46.05	11.1	1.27	9.53
1.625	0412	40	60.33	50.80	12.7	1.27	11.10
1.750	0444	42	63.50	53.98	12.7	1.27	11.10
		43					
		45					
1.875	0476	48	66.68	57.15	12.7	1.27	11.10
2.000	0508	50	69.85	60.33	12.7	1.27	11.10
2.125	0539	53	76.20	60.33	14.2	1.27	12.70
		54					
2.250	0571	55	79.38	61.90	14.2	1.27	12.70
2.375	0603	60	82.55	65.10	14.2	1.27	12.70
2.500	0635	63	85.73	68.25	14.2	1.27	12.70
2.625	0666	65	85.73	71.42	15.9	2.54	14.27
2.750	0698	70	88.90	74.60	15.9	2.54	14.27
2.875	0730	73	95.25	77.77	15.9	2.54	14.27
3.000	0762	75	98.43	80.95	15.9	2.54	14.27
3.125	0793	-	101.60	84.12	19.8	2.54	16.66
3.250	0825	80	104.78	87.30	19.8	2.54	16.66
3.375	0857	85	107.95	90.47	19.8	2.54	16.66
3.500	0889	90	111.13	93.65	19.8	2.54	16.66
3.625	0920	-	114.30	96.82	19.8	2.54	16.66
3.750	0952	95	117.48	100.00	19.8	2.54	16.66
3.875	0984	-	120.65	103.17	19.8	2.54	16.66
4.000	1016	100	123.83	106.35	19.8	2.54	16.66