


SS60/SS66

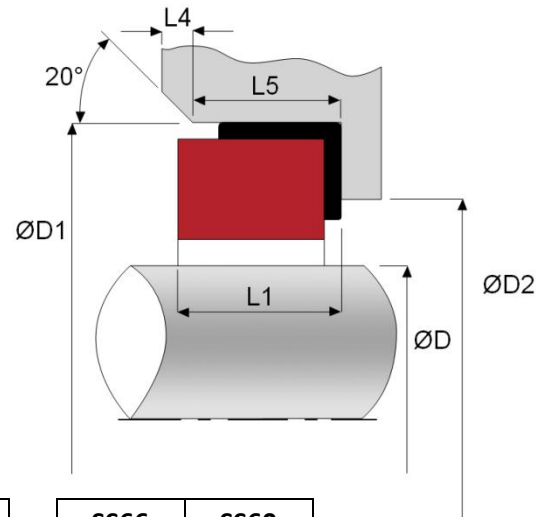

Materials

Stationary - Cer, Sic, SSic, TC, ChrStl
 Elastomer - NBR, EPDM, Viton

Code	Metric ØD	ØD1	ØD2	L4	L5
0120	12	23	19	1.5	4
0140	14	25	21	1.5	4
0160	16	27	23	1.5	4
0180	18	33	27	2.0	5
0200	20	35	29	2.0	5
0220	22	37	31	2.0	5
0240	24	39	33	2.0	5
0250	25	40	34	2.0	5
0280	28	43	37	2.0	5
0300	30	45	39	2.0	5
0320	32	48	42	2.0	5
0330	33	48	42	2.0	5
0350	35	50	44	2.0	5
0380	38	56	49	2.0	6
0400	40	58	51	2.0	6
0430	43	61	54	2.0	6
0450	45	63	56	2.0	6
0480	48	66	59	2.0	6
0500	50	70	62	2.5	6
0530	53	73	65	2.5	6
0550	55	75	67	2.5	6
0580	58	78	70	2.5	6
0600	60	80	72	2.5	6
0630	63	83	75	2.5	6
0650	65	85	77	2.5	6
0680	68	90	81	2.5	7
0700	70	92	83	2.5	7
0750	75	97	88	2.5	7
0800	80	105	95	3.0	7
0850	85	110	100	3.0	7
0900	90	115	105	3.0	7
0950	95	120	110	3.0	7
1000	100	125	115	3.0	7

SS66 L1	SS60 L1
8.60	6.60
8.60	6.60
8.60	6.60
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
10.00	7.50
11.00	9.00
11.00	9.00
11.00	9.00
11.00	9.00
11.00	9.00
13.00	9.50
13.00	11.00
13.00	11.00
13.00	11.00
13.00	11.00
13.00	11.00
15.30	11.30
15.30	11.30
15.30	11.30
15.70	12.00
15.70	14.00
15.70	14.00
15.70	14.00
15.70	14.00