


# SSA

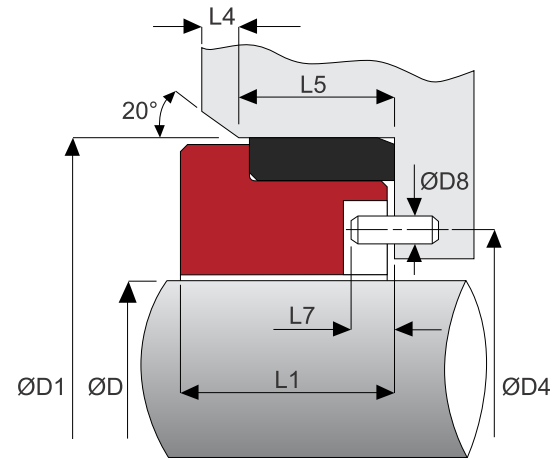

## Materials

Stationary - Cer, Sic, SSic, TC  
 Elastomer - PTFE, Graphite

Shaft ØD			Pin ØD8	ØD1	ØD4	L1	L4	L5	L7
Inches	Code	Metric							
0.500	0127	12	2	25.40	17.1	7.9	2.0	4.4	2.7
	0158	14	2	31.75	21.0	10.3	2.0	6.8	3.3
0.625	0158	16	2	31.75	21.0	10.3	2.0	6.8	3.3
	0191	17	2	34.93	23.9	10.3	2.0	6.8	3.3
	0191	18	2	34.93	23.9	10.3	2.0	6.8	3.3
0.750	0191	19	2	34.93	23.9	10.3	2.0	6.8	3.3
0.875	0222	22	2	38.10	27.0	10.3	2.0	6.8	3.3
	0254	24	2	41.28	30.1	11.1	2.0	7.5	2.7
1.000	0254	25	2	41.28	30.1	11.1	2.0	7.5	2.7
	0285	27	2	44.45	33.3	11.1	2.0	7.5	2.7
1.125	0285	28	2	44.45	33.3	11.1	2.0	7.5	2.7
	0285	29	2	44.45	33.3	11.1	2.0	7.5	2.7
	0317	30	2	47.63	36.5	11.1	2.0	7.5	3.3
1.250	0317	32	2	47.63	36.5	11.1	2.0	7.5	3.3
	0349	34	2	50.80	39.7	11.1	2.0	7.5	3.3
1.375	0349	35	2	50.80	39.7	11.1	2.0	7.5	3.3
1.500	0381	38	2	53.98	42.8	11.1	2.0	7.5	3.3
1.625	0412	40	3	60.33	47.6	12.7	2.0	9.0	3.3
	0444	42	3	63.50	50.8	12.7	2.0	9.0	3.3
	0444	43	3	63.50	50.8	12.7	2.0	9.0	3.3
1.750	0444	45	3	63.50	50.8	12.7	2.5	8.5	3.3
1.875	0476	48	3	66.68	54.0	12.7	2.5	8.5	3.3
2.000	0508	50	3	69.85	57.1	12.7	2.5	8.5	3.3
	0539	53	3	76.20	60.3	14.2	2.5	8.5	3.3
2.125	0539	54	3	76.20	60.3	14.2	2.5	10.2	3.3
2.250	0571	55	3	79.38	63.5	14.2	2.5	10.2	3.3
2.375	0603	60	3	82.55	66.7	14.2	2.5	10.2	3.3
2.500	0635	63	3	85.73	69.8	14.2	2.5	10.2	3.3
2.625	0666	65	3	85.73	73.0	15.9	2.5	11.8	3.3
2.750	0698	70	3	88.90	76.2	15.9	2.5	11.8	3.3
2.875	0730	73	3	95.25	79.3	15.9	3.0	11.3	3.3
3.000	0762	75	3	98.43	82.5	15.9	3.0	11.3	3.3
3.125	0793	-	3	101.60	85.6	19.8	3.0	13.7	3.8
3.250	0825	80	3	104.78	88.8	19.8	3.0	13.7	3.8
3.375	0857	85	3	107.95	92.0	19.8	3.0	13.7	3.8
3.500	0889	90	3	111.13	95.2	19.8	3.0	13.7	3.8
3.625	0920	-	3	114.30	98.3	19.8	3.0	13.7	3.8
3.750	0952	95	3	117.48	101.5	19.8	3.0	13.7	3.8
3.875	0984	-	3	120.65	104.7	19.8	3.0	13.7	3.8
4.000	1016	100	3	123.83	107.9	19.8	3.0	13.7	3.8