


# SSWE/SSWU

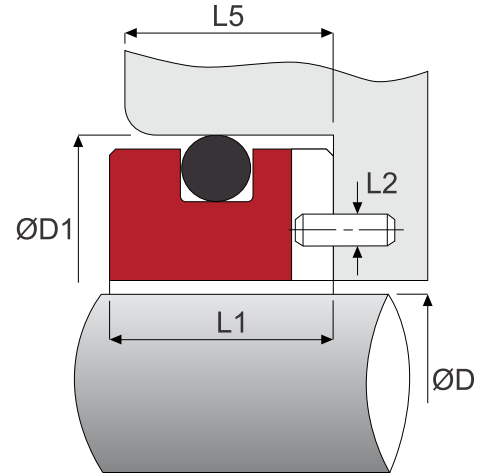

## Materials

Stationary - Cer, Sic, SSic, TC, ChrStl  
 Elastomer - NBR, EPDM, Viton

Shaft ØD			PIN L2	L5
Inches	Code	Metric		
0.375	0095	10	3.0	7.1
0.500	0127	12	3.0	7.1
0.625	0158	14	3.0	8.7
		16		
0.750	0191	17	3.0	8.7
		18		
		19		
		20		
0.810	0206	20	3.0	8.7
0.875	0222	22	3.0	8.7
1.000	0254	24	3.0	8.7
		25		
1.125	0285	27	3.0	10.3
		28		
		29		
1.250	0317	30	3.0	10.3
		32		
1.375	0349	34	3.0	10.3
		35		
1.500	0381	38	3.0	10.3
1.625	0412	40	3.0	10.3
1.750	0444	42	3.0	10.3
		43		
		45		
1.875	0476	48	3.0	10.3
2.000	0508	50	3.0	11.9
2.125	0539	53	3.0	11.9
		54		
2.250	0571	55	3.0	11.9
2.375	0603	60	3.0	11.9
2.500	0635	63	3.0	11.9
2.625	0666	65	4.0	14.3
2.750	0698	70	4.0	14.3
2.875	0730	73	4.0	14.3
3.000	0762	75	4.0	14.3
3.125	0793	-	5.0	18.3
3.250	0825	80	5.0	18.3
3.375	0857	85	5.0	18.3
3.500	0889	90	5.0	18.3
3.625	0920	-	5.0	18.3
3.750	0952	95	5.0	18.3
3.875	0984	-	5.0	18.3
4.000	1016	100	5.0	18.3

SSWE	
ØD1	L1
24.60	8.7
27.80	8.7
30.95	10.3
34.15	10.3
35.70	10.3
37.30	10.3
40.50	10.3
47.65	11.9
50.80	11.9
54.00	11.9
57.15	11.9
60.35	11.9
63.50	11.9
66.70	11.9
69.85	13.5
73.05	13.5
76.20	13.5
79.40	13.5
82.55	13.5
92.10	15.9
95.25	15.9
98.45	15.9
101.60	15.9
111.15	19.9
114.30	19.9
117.50	19.9
120.65	19.9
123.85	19.9
127.00	19.9
130.20	19.9
133.35	19.9

SSWU	
ØD1	L1
-	-
25.40	7.9
31.75	10.3
34.93	10.3
-	-
38.10	10.3
41.28	11.1
44.45	11.1
47.63	11.1
50.80	11.1
53.98	11.1
60.33	12.7
63.50	12.7
66.68	12.7
69.85	12.7
76.20	14.2
79.38	14.2
82.55	14.2
85.73	14.2
85.73	15.9
88.90	15.9
95.25	15.9
98.43	15.9
101.60	19.8
104.78	19.8
107.95	19.8
111.13	19.8
114.30	19.8
117.48	19.8
120.65	19.8
123.83	19.8