

S865




Materials

Rotary	- Car / SiC / SSiC / TC
Stationary	- SiC / SSiC / TC / Cer
Elastomer	- NBR / EPDM / Viton / FFKM

Working Conditions

Pressure	< 30 bar
Speed	< 30 m/s
Temperature	up to 205°C

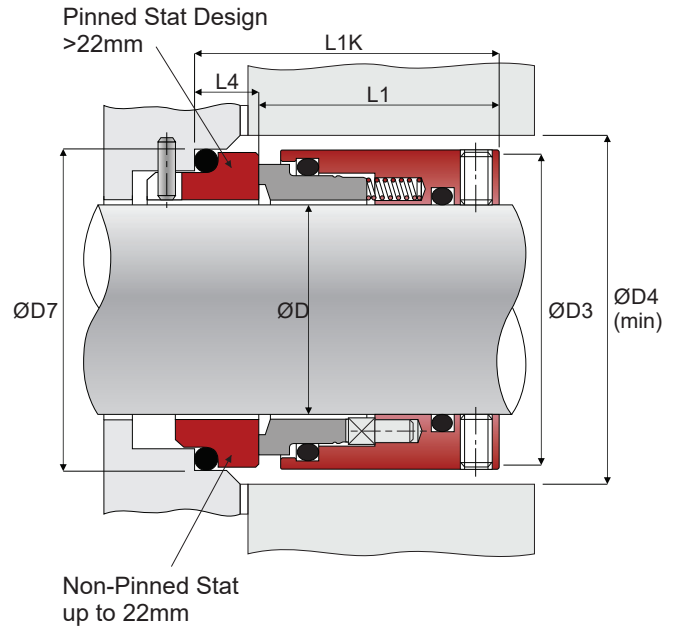

Metric		ØD3	ØD4 (min)	L1	L1K	Stationary Seat		Seat Type
Code	ØD Shaft					ØD7	L4	
0180	18	32	34	31.5	37.5	33	6	SSBS
0200	20	34	36	31.5	37.5	35	6	SSBS
0220	22	36	38	31.5	37.5	37	6	SSBS
0240	24	38	40	33.0	40.0	39	7	SS16
0250	25	39	41	33.0	40.0	40	7	SS16
0280	28	42	44	32.5	42.5	43	10	SSDL
0300	30	44	46	32.5	42.5	45	10	SSDL
0320	32	46	48	32.5	42.5	48	10	SSDL
0330	33	47	49	32.5	42.5	48	10	SSDL
0350	35	49	51	32.5	42.5	50	10	SSDL
0380	38	53	56	34.0	45.0	56	11	SSDL
0400	40	55	58	34.0	45.0	58	11	SSDL
0430	43	58	61	34.0	45.0	61	11	SSDL
0450	45	60	63	34.0	45.0	63	11	SSDL
0480	48	63	66	34.0	45.0	66	11	SSDL
0500	50	66	69	34.0	47.5	70	13.5	SSBP
0530	53	69	72	34.0	47.5	73	13.5	SSBP
0550	55	71	74	34.0	47.5	75	13.5	SSBP
0580	58	76	80	39.0	52.5	78	13.5	SSBP
0600	60	78	82	39.0	52.5	80	13.5	SSBP
0630	63	81	85	39.0	52.5	83	13.5	SSBP
0650	65	83	87	39.0	52.5	85	13.5	SSBP
0700	70	88	92	44.7	60.0	92	15.3	SSDL
0750	75	93	97	44.7	60.0	97	15.3	SSDL