


Features:

- Low load and long life.
- Easy to install and maintain.
- Light weight.
- Excellent Balance performance.
- Standard integrated construction of half-coupling to ensure the best transmission



Size	Rating kW/1000 rpm	Nominal Torque (Nm)	Max rpm	L min	D1	D2	L1	L2	d1max	d2max
086	14	134	7,000	65	54	86	40	60	40	51
105	25	239	6,000	80	69	105	45	64	46	70
130	55	525	5,200	100	90	130	55	80	65	90
152	120	1,164	4,800	120	112	152	62	88	80	102
179	215	2,053	4,400	130	131	179	70	100	90	121
197	360	3,438	4,200	132	163	197	90	-	115	-
222	500	4,775	4,000	135	181	222	95	-	127	-
247	740	7,066	3,800	138	206	247	107	-	140	-
272	930	8,881	3,700	148	223	272	115	-	155	-
297	1,400	13,369	3,600	170	248	297	130	-	172	-

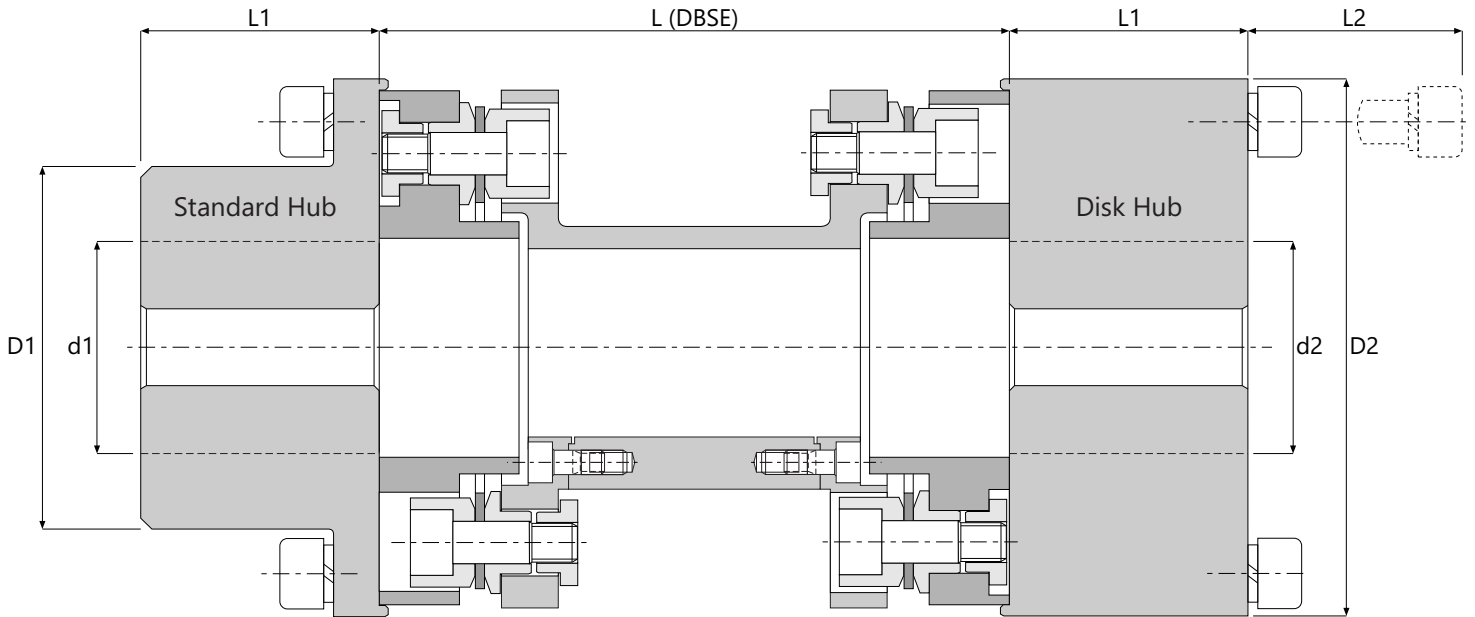

Features:

- Low load and long life.
- Easy to install and maintain.
- Light weight.
- Excellent Balance performance.
- Standard integrated construction of half-coupling to ensure the best transmission



Size	Rating HP/100 rpm	Nominal Torque (lb.in)	Max rpm	L min	D1	D2	L1	L2	d1max	d2max
086	1.9	1.19	7,000	2.559"	2.126"	3.386"	1.575"	2.362"	1.575"	2.008"
105	3.4	2.12	6,000	3.150"	2.717"	4.134"	1.772"	2.520"	1.811"	2.756"
130	7.4	4.65	5,200	3.937"	3.543"	5.118"	2.165"	3.150"	2.559"	3.543"
152	16.1	10.14	4,800	4.724"	4.409"	5.984"	2.441"	3.465"	3.150"	4.016"
179	28.8	18.17	4,400	5.118"	5.157"	7.047"	2.756"	3.937"	3.543"	4.764"
197	48.3	30.43	4,200	5.197"	6.417"	7.756"	3.543"	-	4.528"	-
222	67.1	42.30	4,000	5.315"	7.126"	8.740"	3.740"	-	5.000"	-
247	99.2	62.50	3,800	5.433"	8.110"	9.724"	4.213"	-	5.512"	-
272	124.7	78.60	3,700	5.827"	8.780"	10.709"	4.528"	-	6.102"	-
297	187.7	118.30	3,600	6.693"	9.764"	11.693"	5.118"	-	6.772"	-