

S80 / SSW01




Materials

- Insert Rotary Face - Sic, Ssic, TC
- Solid Rotary Face - Stainless Steel
- Stationary - Carbon, Sic, Ssic, TC
- Elastomer - NBR, EPDM, Viton, FFKM

Working Conditions

- Pressure < 12 bar
- Speed < 20 m/s
- Temperature up to 205°C

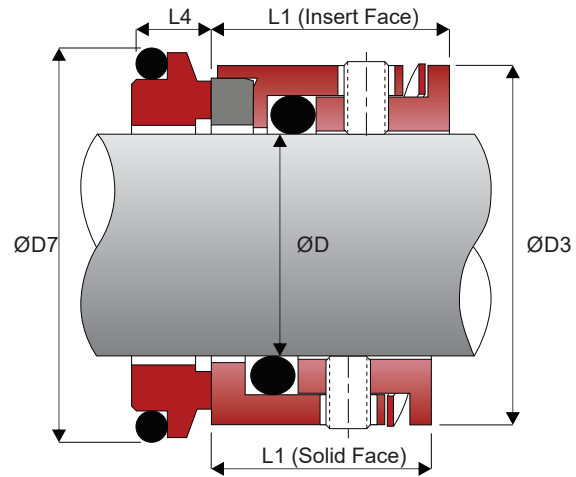

Shaft ØD	Code	ØD3	L1		SSW01	
			Solid Face	Insert Face	L4	ØD7
15.8	0159	27.0	19.1	19.6	6.3	28.5
16.0	0160	27.0	19.1	19.6	6.3	28.5
19.1	0191	30.0	19.1	20.1	6.3	31.7
24.0	0240	34.1	19.1	20.1	7.6	35.4
28.0	0280	40.0	19.1	20.1	7.6	42.0
28.6	0286	39.5	19.1	20.1	7.6	41.2
30.0	0300	41.0	19.1	20.1	7.6	42.7
31.7	0317	42.4	19.1	20.1	7.6	44.2
32.0	0320	42.4	19.1	20.1	7.6	44.4
35.0	0350	45.5	19.1	20.1	7.6	47.6
38.0	0380	51.8	21.1	21.5	7.6	53.9
44.4	0444	58.2	21.1	21.5	8.1	60.3
47.6	0476	61.4	21.1	21.5	8.1	63.5
50.0	0500	61.9	21.1	21.5	8.1	63.9
50.8	0508	64.6	22.1	22.5	9.6	66.6
53.9	0539	71.0	22.1	23.2	9.6	73.0
54.0	0540	71.0	22.1	23.2	9.6	73.9
55.0	0550	72.0	22.1	23.2	9.6	75.0
63.0	0630	79.3	25.8	27.4	9.1	83.0
63.5	0635	79.3	25.8	27.4	9.1	88.9
69.8	0698	88.9	25.8	27.4	9.1	95.2
73.0	0730	94.0	25.8	27.4	9.1	98.4
75.0	0750	96.0	25.8	27.4	9.1	100.4
76.2	0762	96.0	25.8	27.4	9.1	100.4

SSW011

SSW011 - Inoxpa Prolac and SLR Pumps			
Shaft ØD	Code	L4	ØD7
28.0	0280	10.1	46.0
35.0	0350	12.0	53.0
50.0	0500	12.0	70.0

SSW011 stationary is used in conjunction with S80 rotary.

