

S136




Working Conditions

Pressure	≤ 28 bar
Speed	≤ 25 m/s
Temperature	≤ 205°C

Materials

Stationary	- SiC / SSiC / TC
Rotary	- SiC / SSiC / TC
Elastomer	- NBR / EPDM / Viton / Aflas / FFKM

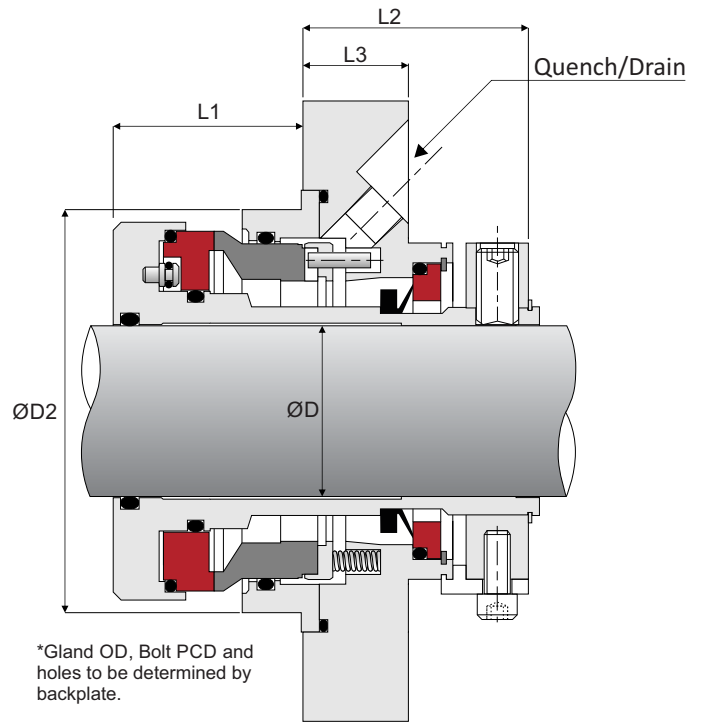

Shaft ØD		Min S-Box ØD2	L1	L2	L3
From	Max				
20.00	30.00	73.0	32.5	54.5	20.0
31.75	41.28	91.0	32.5	60.5	23.0
43.00	48.00	96.0	34.5	63.5	26.0
50.00	55.00	106.0	34.5	68.5	31.0
57.10	70.00	125.0	40.5	68.5	31.0
73.00	76.20	136.0	47.5	71.5	32.0
79.38	86.00	144.5	45.5	71.5	32.0
88.90	92.00	154.0	45.5	71.5	32.0
95.00	112.00	178.0	59.0	85.0	38.5
114.30	124.00	193.0	59.0	85.0	38.5
125.00	140.00	211.0	59.0	85.0	38.5
142.88	158.00	231.0	60.5	93.5	47.0
158.75	165.10	246.0	60.0	94.0	47.5
168.28	194.00	272.0	60.0	94.0	47.5
196.85	200.00	281.0	67.4	97.0	50.5
203.20	220.00	294.0	69.3	97.0	50.5

Features:

- Stationary Design
- Monolithic Faces
- Pressure Balanced
- Springs outside the media
- +/-2.5mm Axial movement
- Connection for Quench
- Exotic Wetted Metal Parts