

SR00 / SR20




Materials

Stationary -Car,SiC,SSiC,TC
 Rotary -SiC,SSiC, TC, S/S
 Elastomer -NBR,EPDM,Vit

WorkingConditions

Pressure <12bar
 Speed <16m/s
 Temperature upto205°C

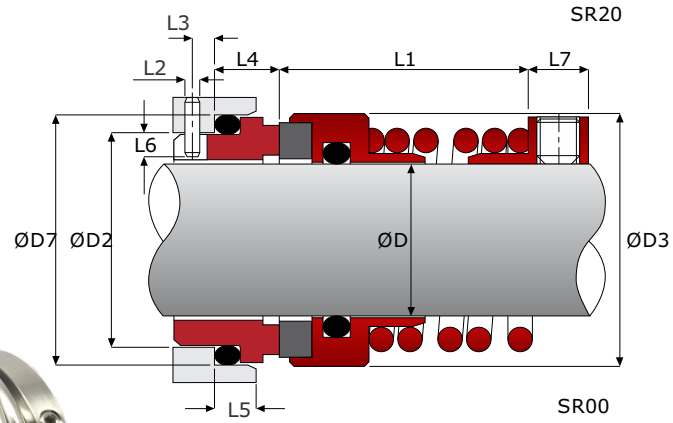

Shaft ØD1		Code	ØD2	ØD3	ØD7	L1	L2	L3	L4	L5	L6	L7
Metric	Imperial											
	0.625	0158	24.3	29.0	28.6	24.5	3	4	9	4.4	4.2	8.0
	0.750	0191	27.4	32.5	31.7	24.5	3	4	9	4.4	4.1	8.0
20		0200	29.0	34.5	33.3	27.5	3	4	9	4.4	4.0	9.5
	0.875	0222	30.7	34.9	34.9	26.0	3	4	9	4.4	4.2	9.5
25		0250	33.8	38.1	39.9	30.0	3	4	10	5.5	3.9	9.5
	1.000	0254	33.8	38.1	39.9	30.0	3	4	10	5.5	4.2	9.5
28		0280	37.0	42.0	43.1	31.5	3	4	10	5.5	4.0	9.5
	1.125	0286	37.0	42.9	43.1	31.5	3	4	10	5.5	4.2	9.5
30		0300	38.6	45.5	44.6	31.5	3	4	10	5.5	3.8	9.5
	1.250	0317	40.3	46.0	46.3	34.5	3	4	10	5.5	4.2	9.5
32		0320	40.8	47.0	46.3	34.5	3	4	10	5.5	3.9	9.5
	1.375	0349	43.5	49.2	49.5	37.5	3	4	10	5.5	4.2	9.5
35		0350	43.5	50.0	49.5	37.5	3	4	10	5.5	3.8	9.5
38		0380	46.6	53.0	52.6	37.5	3	4	10	5.5	3.8	9.5
	1.500	0381	46.6	52.4	52.6	37.5	3	4	10	5.5	4.2	9.5
40		0400	48.1	55.0	54.3	37.5	3	4	10	5.5	3.6	9.5
	1.625	0412	49.8	55.5	55.8	37.5	3	4	10	5.5	4.2	9.5
42		0420	49.8	55.5	55.8	37.5	3	4	10	5.5	3.4	9.5
	1.750	0444	53.0	58.7	59.0	37.5	3	4	10	5.5	4.2	9.5
45		0450	53.0	60.0	59.0	37.5	3	4	10	5.5	3.5	9.5
	1.875	0476	57.7	61.9	63.7	42.5	3	5	10	5.5	5.0	12.7
50		0500	59.3	66.0	65.4	45.5	3	5	10	5.5	4.2	12.7
	2.000	0508	60.9	66.7	66.9	45.5	3	5	10	5.5	5.0	12.7
	2.125	0539	64.0	69.9	70.0	47.0	3	5	10	5.5	5.0	12.7
55		0550	64.0	71.0	70.0	47.0	3	5	10	5.5	4.0	12.7
	2.250	0571	67.1	73.0	73.2	47.0	3	5	10	5.5	4.9	12.7
60		0600	70.4	77.0	76.4	50.5	3	5	10	5.5	4.7	12.7
	2.375	0603	70.4	76.2	76.4	50.5	3	5	10	5.5	5.0	12.7
	2.500	0635	73.5	79.4	79.6	50.5	3	5	10	5.5	5.0	12.7
65		0650	75.2	82.0	81.2	53.5	3	5	10	5.5	4.6	12.7
	2.625	0666	76.7	82.6	82.7	53.5	3	5	10	5.5	5.0	12.7
	2.750	0698	79.9	85.7	85.9	53.5	3	5	10	5.5	5.0	12.7
70		0700	79.9	87.0	85.9	53.5	3	5	10	5.5	4.5	12.7
	2.875	0730	83.0	90.0	89.1	56.5	3	5	10	5.5	4.9	14.3
75		0750	84.7	91.5	90.8	56.6	3	5	10	5.5	4.4	14.3
	3.000	0762	89.4	95.3	95.4	63.0	3	5	10	5.5	6.6	14.3