

# S2




## Materials

Rotary - Car, Sic, SSic, TC  
 Elastomer - NBR, EPDM, Viton

## Working Conditions

Pressure < 28 bar  
 Speed < 13 m/s  
 Temperature up to 205°C

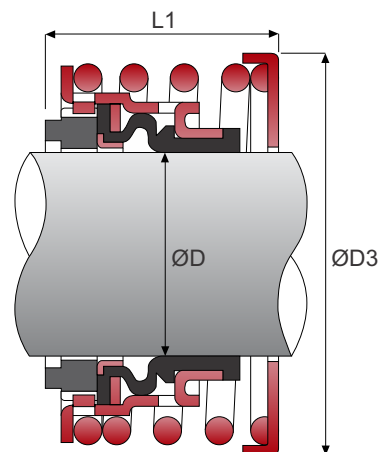

Metric		Imperial		ØD3	L1
Code	ØD	Code	ØD		
0120	12	0127	0.500	30.2	20.7
0140	14			33.3	22.2
0160	16	0159	0.625		
0180	18	0191	0.750	36.5	22.2
0200	20			39.7	23.8
0220	22	0222	0.875		
0240	24			45.3	25.4
0250	25	0254	1.000		
0280	28	0286	1.125	48.5	27
0300	30			52.8	27
0320	32	0317	1.250		
0330	33			56	28.6
0350	35	0349	1.375		
0380	38	0381	1.500	59.2	28.6
0400	40	0412	1.625	67	34.9
0430	43			70.1	34.9
0450	45	0444	1.750		
0480	48	0476	1.875	73.2	38.1
0500	50	0508	2.000	76.5	38.1
0530	53	0539	2.125	82.7	42.8
0550	55	0571	2.250	85.9	42.8
0600	60	0603	2.375	89.1	46
0630	63	0635	2.500	92.2	46
0650	65	0666	2.625	98.4	49.2
0700	70	0698	2.750	101.6	49.2
0730	73	0730	2.875	104.8	52.4
0750	75	0762	3.000	108	52.4