

# S609




## Materials

Face - Car, Antimony Car, Sic, SSic, TC  
Elastomer - Graphite

## Working Conditions

Pressure < 20 bar  
Speed < 25 m/s  
Temperature -75° to 425°C

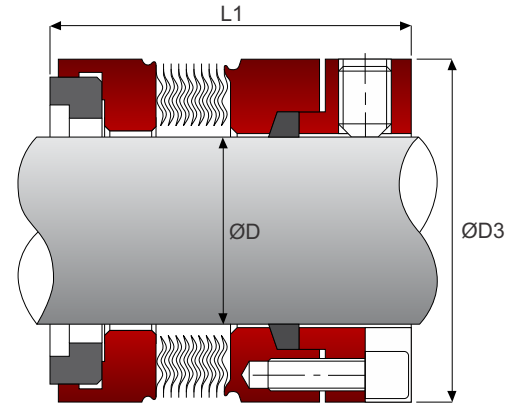

Imperial		ØD3	L1
Shaft ØD	Code		
1.000	0254	41.28	38.89
1.125	0285	44.45	39.67
1.250	0318	47.63	40.46
1.375	0349	50.80	40.46
1.500	0381	53.98	40.46
1.625	0412	57.15	40.46
1.750	0444	60.33	41.28
1.875	0476	63.50	41.28
2.000	0508	66.68	42.06
2.125	0539	69.85	42.06
2.250	0572	73.03	43.66
2.375	0603	76.20	43.66
2.500	0635	82.55	44.45
2.625	0666	85.73	45.24
2.750	0698	88.90	45.24
2.875	0730	93.65	47.63
3.000	0762	96.82	47.63
3.125	0794	101.60	47.63
3.250	0825	104.78	47.63
3.375	0857	107.95	47.63
3.500	0889	111.13	47.63
3.625	0921	114.30	47.63
3.750	0953	117.48	47.63
3.875	0984	120.65	47.63
4.000	1016	123.83	47.63