

SHJ92




Materials

Rotary - Carbon
 Stationary SS16 - SiC, SSiC, TC
 Elastomer - NBR, EPDM, Viton, FFKM

Working Conditions

Pressure < 25 bar
 Speed < 15 m/s
 Temperature up to 205°C

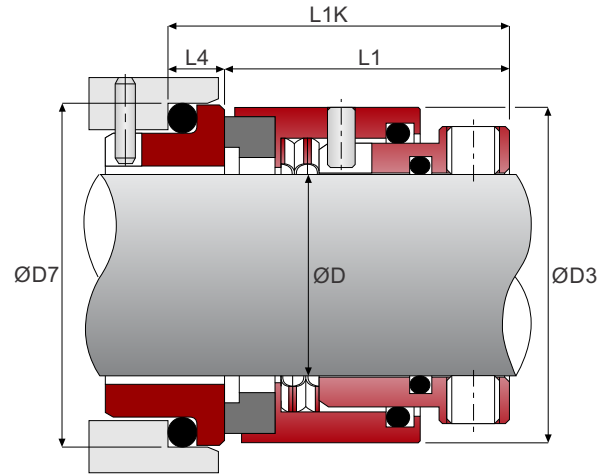

Metric		ØD3	L1	L1K	SS16	
Shaft ØD	Code				ØD7	L4
18	0180	32.0	30.5	37.5	33.0	7.0
20	0200	34.0	30.5	37.5	35.0	7.0
22	0220	36.0	30.5	37.5	37.0	7.0
24	0240	38.0	33.0	40.0	39.0	7.0
25	0250	39.0	33.0	40.0	40.0	7.0
28	0280	42.0	35.5	42.5	43.0	7.0
30	0300	44.0	35.5	42.5	45.0	7.0
32	0320	47.0	35.5	42.5	48.0	7.0
33	0330	47.0	35.5	42.5	48.0	7.0
35	0350	49.0	35.5	42.5	50.0	7.0
38	0380	54.0	37.0	45.0	56.0	8.0
40	0400	56.0	37.0	45.0	58.0	8.0
43	0430	59.0	37.0	45.0	61.0	8.0
45	0450	61.0	37.0	45.0	63.0	8.0
48	0480	64.0	37.0	45.0	66.0	8.0
50	0500	66.0	38.0	47.5	70.0	9.5
53	0530	69.0	38.0	47.5	73.0	9.5
55	0550	71.0	38.0	47.5	75.0	9.5
58	0580	78.0	42.0	52.5	78.0	10.5
60	0600	80.0	42.0	52.5	80.0	10.5
63	0630	83.0	42.0	52.5	83.0	10.5
65	0650	85.0	42.0	52.5	85.0	10.5
68	0680	88.0	41.5	52.5	90.0	11.0
70	0700	90.0	48.5	60.0	92.0	11.5
75	0750	99.0	48.5	60.0	97.0	11.5
80	0800	104.0	48.5	60.0	105.0	11.5
85	0850	109.0	48.5	60.0	110.0	11.5
90	0900	114.0	52.0	65.0	115.0	13.0
95	0950	119.0	52.0	65.0	120.0	13.0
100	1000	124.0	52.0	65.0	125.0	13.0