




SM7N

Materials

Stationary - Sic, SSic, TC, Carbon
 Rotary - Sic, SSic, TC, S/S
 Elastomer - NBR, EPDM, Viton

Working Conditions

Pressure < 25 bar
 Speed < 20 m/s
 Temperature Up to 205°C

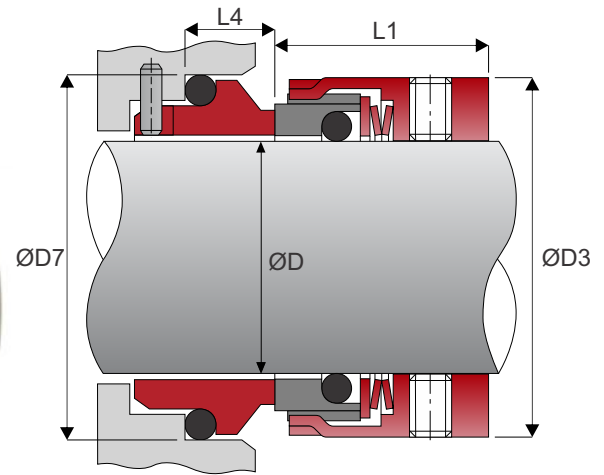

Metric		L1	ØD3	SS9 - Stationary	
Shaft ØD	Code			L4	ØD7
14	0140	25.0	25	10.0	25.0
16	0160	25.0	27	10.0	27.0
18	0180	26.0	33	11.5	33.0
20	0200	26.0	35	11.5	35.0
22	0220	26.0	37	11.5	37.0
24	0240	28.5	39	11.5	39.0
25	0250	28.5	40	11.5	40.0
28	0280	31.0	43	11.5	43.0
30	0300	31.0	45	11.5	45.0
32	0320	31.0	47	11.5	48.0
33	0330	31.0	48	11.5	48.0
35	0350	31.0	50	11.5	50.0
38	0380	31.0	55	14.0	56.0
40	0400	31.0	57	14.0	58.0
43	0430	31.0	60	14.0	61.0
45	0450	31.0	62	14.0	63.0
48	0480	31.0	65	14.0	66.0
50	0500	32.5	67	15.0	70.0
53	0530	32.5	70	15.0	73.0
55	0550	32.5	72	15.0	75.0
58	0580	37.5	79	15.0	78.0
60	0600	37.5	81	15.0	80.0
63	0630	37.5	84	15.0	83.0
65	0650	37.5	86	15.0	85.0
68	0680	34.5	89	18.0	90.0
70	0700	42.0	91	18.0	92.0
75	0750	42.0	99	18.0	97.0
80	0800	41.8	104	18.2	105.0