

TSURUMI




S560T

Materials


Stationary - Sic, Ceramic
 Rotary - Sic, Carbon
 Elastomer - NBR / EPDM / Viton

Working Conditions

Pressure < 5 bar
 Speed < 8 m/s
 Temperature up to 100°C

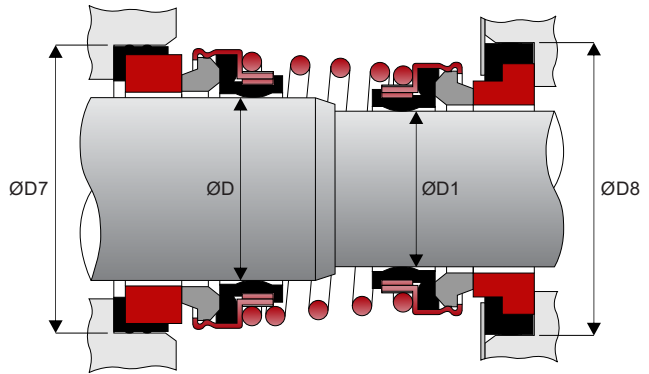

Code	ØD	ØD1	ØD7	ØD8
0250	25	20	44	44
0300	30	25	50	50
030B	30	25	44	50
0350	35	30	58	57
035B	35	30	54	57
0400	40	35	64	64
0500	50	45	72	70

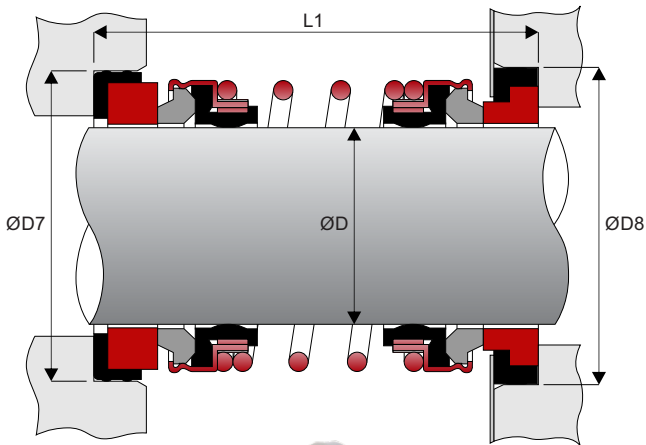

S560D



Metric		ØD7	ØD8	L1
Code	Shaft ØD			
0120	12	25	25	36.0
0130	13	25	25	36.0
0140	14	30	30	36.0
0150	15	30	30	36.0
0160	16	30	30	36.0
0180	18	35	38	49.0
0190	19	35	38	49.0
0200	20	38	44	49.0
020B	20	38	38	50.0
0250	25	44	50	51.0
025B	25	44	44	51.0
0300	30	50	57	59.0
030B	30	44	57	59.0
0350	35	58	64	61.0
035B	35	54	57	61.0
0400	40	64	70	64.5
0450	45	66	70	65.0
0500	50	72	80	69.5