

# S1906



### Materials



Stationary - SiC, SSiC, TC  
 Rotary - Ant Car, Car, SiC, SSiC, TC  
 Elastomer - Graphite

### Working Conditions

Pressure < 20 bar  
 Speed < 20 m/s  
 Temperature -75°C to 425°C

### Features

API 682  
 Floating Quench  
 High Temperature  
 Optimum 45° tilt angle  
 Multi-Flush Port

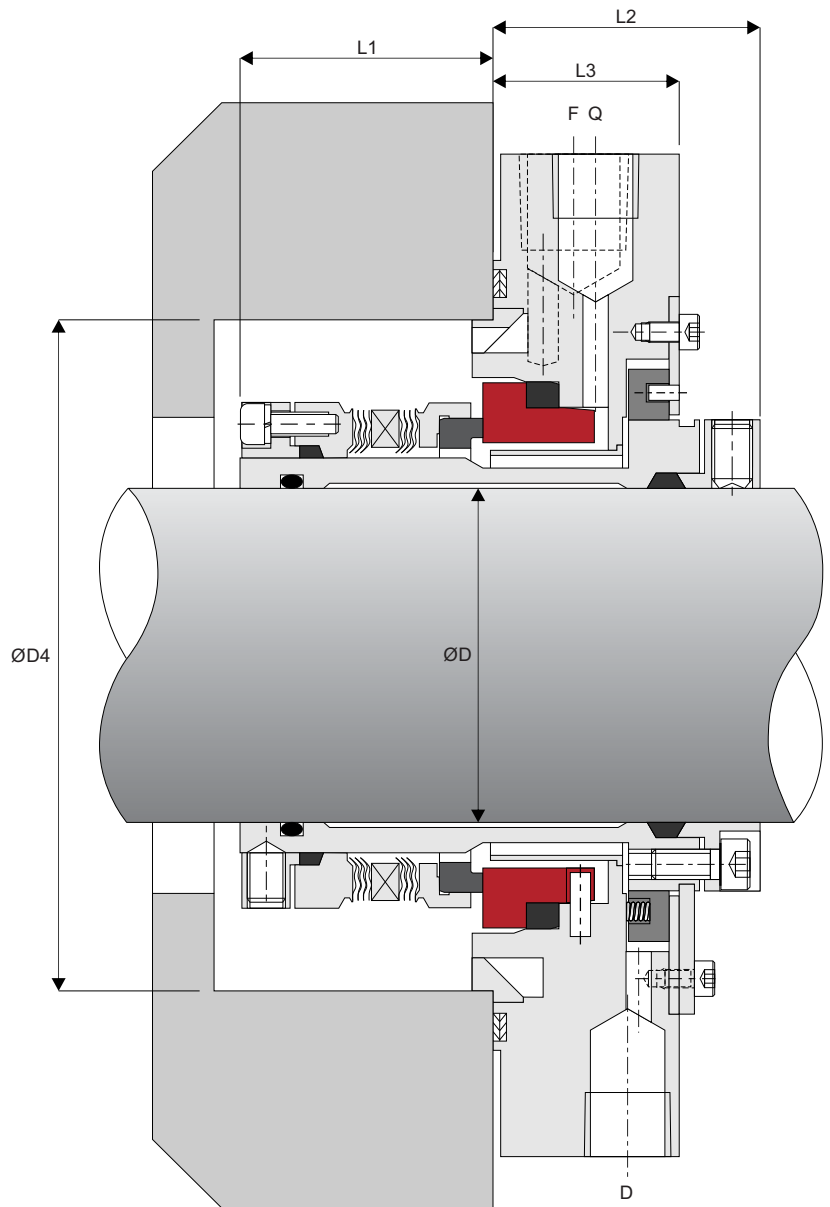

Seal Size	Shaft ØD MAX		ØD3		ØD4		STUD SIZE		ØD6 PCD		L1		L2		L3	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
1	20	(0.787)	NO DESIGN AVAILABLE FOR THIS SIZE													
2	30	(1.181)	140	(5.512)	80	(3.150)	M12x1.75	1/2"-13	115	(4.528)	43	(1.693)	53	(2.087)	37	(1.457)
3	40	(1.575)	150	(5.906)	90	(3.543)	M12x1.75	1/2"-13	125	(4.921)	43	(1.693)	53	(2.087)	37	(1.457)
4	50	(1.969)	175	(6.890)	100	(3.937)	M16x2.0	5/8"-11	140	(5.512)	43	(1.693)	53	(2.087)	37	(1.457)
5	60	(2.362)	195	(7.677)	120	(4.724)	M16x2.0	5/8"-11	160	(6.299)	50	(1.969)	53	(2.087)	37	(1.457)
6	70	(2.756)	205	(8.071)	130	(5.118)	M16x2.0	5/8"-11	170	(6.693)	50	(1.969)	53	(2.087)	37	(1.457)
7	80	(3.150)	215	(8.465)	140	(5.512)	M16x2.0	5/8"-11	180	(7.087)	50	(1.969)	53	(2.087)	37	(1.457)
8	90	(3.543)	245	(9.646)	160	(6.299)	M20x2.5	3/4"-10	205	(8.071)	50	(1.969)	53	(2.087)	37	(1.457)
9	100	(3.937)	255	(10.039)	170	(6.693)	M20x2.5	3/4"-10	215	(8.465)	50	(1.969)	53	(2.087)	37	(1.457)
10	110	(4.331)	265	(10.433)	180	(7.087)	M20x2.5	3/4"-10	225	(8.858)	50	(1.969)	53	(2.087)	37	(1.457)